

butech



Professional Book

PORCELANOSA Grupo




BY APPOINTMENT TO
H.M. THE KING
MANUFACTURERS AND DISTRIBUTORS
OF CERAMIC TILES AND BUILDING PRODUCTS.
PORCELANOSA UK LIMITED

PORCELANOSA Grupo



High-end decorative profile for wall tiles, 24K Gold plated.



pro-part gold

pro-part Li gold

24 carat Gold plated profile. 12 and 13,5 mm decorative trim.



pro-part Li gold 11mm 12x11x2500 mm	100100726
pro-part Li gold 12,5mm 13,5x12,5x2500 mm	100100762

pro-part gold

24 carat Gold plated profile. 8 mm decorative trim.



pro-part gold 7mm 8x7x2500 mm	100246452
pro-part gold 9mm 8x9x2500 mm	100331779
pro-part gold 11mm 8x11x2500 mm	100100724
pro-part gold 12.5mm 8x12,5x2500 mm	100100725

pro-mate 5 gold


24 carat Gold plated profile. 5 mm decorative trim.

pro-mate 5 gold 11mm 5x11x2500 m	100100721
pro-mate 5 gold 12.5mm 5x12,5x2500 mm	100100722

pro-T

Profile for transitions between floor or wall coverings.


Profiles for transitions between tiles or slabs with slightly different heights. Available in two widths: 14 and 25 mm. Specially recommended for transitions between ceramic tiles and wooden floors.



Floor tile




pro-T




Chromed brass	
SAP	h (mm)
100005460	14
100005461	25

pro-T



Anodized aluminium silver	
SAP	h (mm)
100005452	14
100005453	25

pro-T




Gloss stainless steel	
SAP	h (mm)
100005462	14
100005463	25

Brushed stainless steel	
SAP	h (mm)
100005464	14
100005465	25


pro-level

Transition profile between floor coverings at different levels. It covers the non-glazed edge of the tile and protects it from shocks.

Technical profiles for small height differences between floor coverings. Available in rounded finish and sloped finish. Specially recommended for high transit floors.



Floor tile



Floor tile



pro-level C




Anodized aluminium silver	
SAP	h (mm)

structural joints

Profile for structural joints in ceramic floor coverings.

Metallic profiles with a central elastic joint that absorbs the structural movements of the support. Available with deformable polypropylene joint for pedestrian transit and moving metallic joint for wheeled transit.

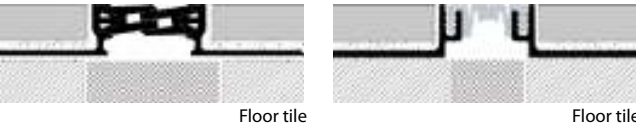

structural joints BT




BT-34		
SAP		h (mm)
100332105	Gris	22
100332093	Gris	40

Accepted traffic: Pedestrian and vehicles with pneumatic wheels up to 35 kN.

structural joints AT

AT-50		
SAP		h (mm)
100324422		22
100324431		50

Accepted traffic: Pedestrian, vehicles with pneumatic wheels up to 300 kN and forklift trucks or solid wheeled hand pallet trucks up to 9 kg/mm.

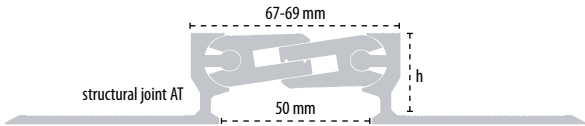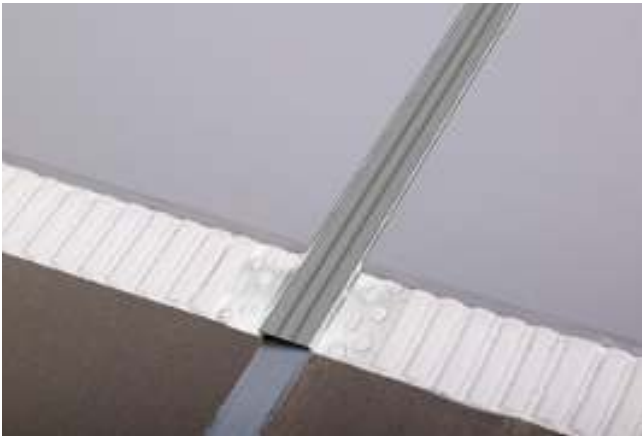

pro-step

Profile for the making of stair steps. It substitutes the traditional step ceramic piece by a combination of ceramic tile and profile.

Metallic profiles that cover the non-glazed edge of the tile, protect it from shocks and reduce the risk of slipping.



pro-step

Stainless steel M2		
SAP		h (mm)
100005523		11

pro-step

Anodized aluminium silver M1		
SAP		h (mm)
100005509		11
100067688		13,5

pro-step

PVC 35		
SAP		h (mm)
100005482	Grey	11
100367492	Black	11

